


Lenovo ThinkVision E65 LFD

Enhance collaboration in larger huddle spaces.



Effective display for your meetings

Experience great visibility and installation flexibility in your meeting space with the display's high brightness and anti-glare design.

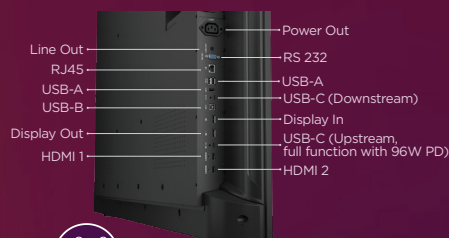

Connect and collaborate with ease

Easily connect your own device with built-in USB-C docking. Enjoy seamless meetings without the need for an external dock, making collaboration simple and clutter-free.



Smarter computing for uncompromised workflows

Deploy and scale Microsoft Teams Rooms (MTR) effortlessly with Lenovo's advanced computing solutions, including ThinkSmart Core and ThinkSmart Tiny devices, which can be seamlessly managed through ThinkSmart Manager.

Lenovo ThinkVision E65 LFD

Display

Panel Size	64.5-inch
Screen Dimensions	1446.3 mm x 836.7 mm
Panel Type	In-Plane Switching
Active Area	1428.5 mm x 803.5 mm
Curvature	Flat
Backlight	DLED
Aspect Ratio	16:9
Resolution	3840 x 2160
Pixel Pitch	0.3720 mm x 0.3720 mm
Dot/Pixel Per Inch (DPI/PPI)	68
Viewing Angle (H x V @ CR 10:1)	178° / 178°
Response Time	8ms
Refresh Rate	60Hz
Brightness	400 cd/m ²
Contrast Ratio (Typical)	5000:1
Color Gamut (Color Area Ratio)	72% NTSC (CIE 1931) 75% DCI-P3 (CIE 1976) 95% sRGB (CIE 1976)
Color Support (Typical)	1.07 Billion
Color Depth	10-bit (8+FRC)
HDR Compliance	Yes (HDR10)
Anti-glare	Yes (28%)

Connectivity

Video Signal	1 x USB-C ¹ (DP 1.4 Alt Mode HBR3) 2 x HDMI 2.1 ² 1 x DP 1.4 1 x DP 1.4 Out
Audio Signal	1 x Line Out (3.5 mm)
Ethernet (RJ45)	Yes (10M/100M/1000M)
Control (RS232)	Yes
USB Upstream	1 x USB-B (USB 5Gbps / USB 3.2 Gen 1) ³ 1 x USB-C (USB 10Gbps / USB 3.2 Gen 2) ³
USB Downstream	4 x USB-A (USB 5Gbps / USB 3.2 Gen 1) ³ 1 x USB-C (USB 5Gbps / USB 3.2 Gen 1) ³

Multimedia

Integrated Speakers	Yes (2 x 10W)
Speaker Support	Yes (Optional Support ⁴)

Special Features

PiP/PbP	Yes
KVM Switch	Yes
Daisy Chain	Yes (Up to 4)
Software	Lenovo ThinkColour (Lenovo Accessories and Display Manager) ⁵
Hardware Low Blue Light	Yes

Power

Power Consumption (Typ. / Max.)	110.0W / 380.0W
Power Consumption Sleep/Off Mode	< 0.5W
Power Consumption Switch-Off Mode	< 0.3W
ENERGY STAR Power Consumption (Pon/E_{tec})	100.0W / 146.0kWh

Power Supply

Internal	
Upstream Power Delivery⁶	Up to 96W PD3.1
Downstream Power Delivery⁶	Up to 15W
Smart Power	Yes
AI Power Saving	Yes (5%)
Voltage Required	AC 100 to 240 V (50-60Hz)

Mechanical

Tilt Angle (Back)	0.1° ~ 5°
VESA Mount Capability	Yes (300 x 300 mm)
Cable Management	Yes
Bezel Color	Black
Bezel Width (Side)	1.9 mm
Bezel Width (Top)	1.9 mm
Bezel Width (Bottom)	21.2 mm

Dimension

Size Packed (W x D x H, mm/inch)	1620.0 x 188.0 x 945.0 mm 63.78 x 7.41 x 37.21 inches
Size Unpacked (W x D x H, mm/inch)	1446.3 x 126.0 x 847.0 mm 56.94 x 4.96 x 33.35 inches
Weight Packed (kg / lbs.)	31.4 kg / 69.2 lbs.
Weight Unpacked (kg / lbs.)	25.1 kg / 55.4 lbs.

What's in the Box

Monitor Head Only	Yes
Wall Mount Bracket	Yes
Core & Tiny Cage	Yes
Power Cord (Cord Length)	1 x Power Cord (2.8m) 1 x Power Cord (1.8m) for TH
Power Cord for Adapter	1 x Power Cord for Adapter (1m)
USB Cable (Cable Length)	1 x USB-C to USB-C Gen 1 Cable (3m, 5Gbps)
Quick Setup Guide	Yes
Tools	1 x Screwdriver 2 x Cable Clip 2 x Washer 15 x Screws 8 x Expansion Tubes
Remote Controller	Yes
Battery	Yes
iLFD Head	Yes

Certification

ENERGY STAR Certification	Yes
EPEAT	Silver
Windows Certification	Windows 10, Windows 11
EU Energy Level Certification	Yes (Level-F)
China Energy Efficiency Standard	G2
TÜV Rheinland Flicker Free	Yes
TÜV Rheinland Low Blue Light (Hardware Solution)	Yes



¹ USB Type-C and USB-C are registered trademarks of USB Implementers Forum. | ² Supports 3840 x 2160 @ 60Hz as specified in HDMI 2.1. | ³ The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed. USB 2.0: 480 Mbit/s; USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1) 5 Gbit/s; USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2) 10 Gbit/s; USB4[®] 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps) 20 Gbit/s; USB4[®] 40Gbps (USB 40Gbps) 40 Gbit/s; Thunderbolt™ 3/4: 40 Gbit/s. | ⁴ Compatible with ThinkSmart Bar 180. | ⁵ Formerly Lenovo Display Control Center. Supports Windows 10 & 11, Mac OS (functions vary across systems). | ⁶ Listed as maximum capacity of power delivery. Actual capacity of power delivery may vary depending upon devices connected or monitor configuration, and may decline with downstream USB ports connected or higher brightness setting.